CRES COR®

JOB: _____

ITEM NO: _____

ROAST-N-HOLD™
GENTLE CONVECTION OVEN
MODEL CO-151-HUA-6 (HALF SIZE)

FEATURES AND BENEFITS:

- Fully insulated half size Roast-N-Hold gentle convection oven designed for flavorful results by slow roasting.
- Slow convected air system promotes natural browning for flavor and seals in natural juices. Slow roasting means 15% to 20% less shrinkage.
- Efficient 4700 Watt power unit allows for rethermalizing of prepared meals or bulk items. Maximum temperature 350˚F. (176.5˚C.). Also available with 2000 Watt power unit; maximum temperature 250˚F. (121˚C.).
- Pre-setting automatic controls for roasting and holding cycles allows for unattended operation 24 hours a day.
- Roast and hold over 120 lbs. (54 kg.) of meat in just 6 sq. ft. of floor space.
- Non-venting oven, permitted by most local codes, provides easy, inexpensive installation.
- Self-contained power top lifts off for ease of maintenance; available to suit your power requirements.
- 304 stainless steel construction throughout for ease of cleaning.
- Smooth interior coved corners prevent food particle/grease buildup.
- Field reversible insulated door prevents temperature loss. Silicone door gasket for proper seal. High temperature ceramic magnetic latch for “easy open” and security during transport. Latch and hinges mounted inboard.
- Standard with right hand hinging; left hand hinging available upon request.
- Stainless steel universal angles accommodate a large variety of pan sizes on adjustable 1-1/2" spacing. Supplied with six sets of angles and three raised wire grids.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.
- Ovens can be stacked for flexibility.
- Free cooking manual and operation manual provided with the purchase of any Roast-N-Hold Oven.

POWER UNIT OPTIONS:

- 4700 Watts, 208 Volts, 1 Phase, 60 Hz.
- 4700 Watts, 240 Volts, 1 Phase, 60 Hz.
- 4700 Watts, 208 Volts, 3 Phase, 60 Hz.
- 4700 Watts, 240 Volts, 3 Phase, 60 Hz.

Probe Power Unit Available at Extra Cost (see page E-6)

CO-151-HUA-6

NSF® UL® C UL®

ACCESSORIES and OPTIONS (Available at extra cost):

- ❑ Stacking Kit
- ❑ Security Panel for Controls
- ❑ Tempered Glass Door Window
- ❑ Push Handle
- ❑ Key Lock Latch
- ❑ Extra Universal Angles
- ❑ Extra Wire Grids
- ❑ Perimeter Bumper
- ❑ Corner Bumpers
- ❑ Floor Lock (for use with 5” casters)
- ❑ Various Caster Options
- ❑ 50 Cycle Service

See page E-10 for accessory details.

CRES COR®

5925 Heisley Road • Mentor, OH 44060-1833
Phone: 877/CRESCOR • Fax: 440/350-7267
www.crescor.com

CO-151-HUA-6

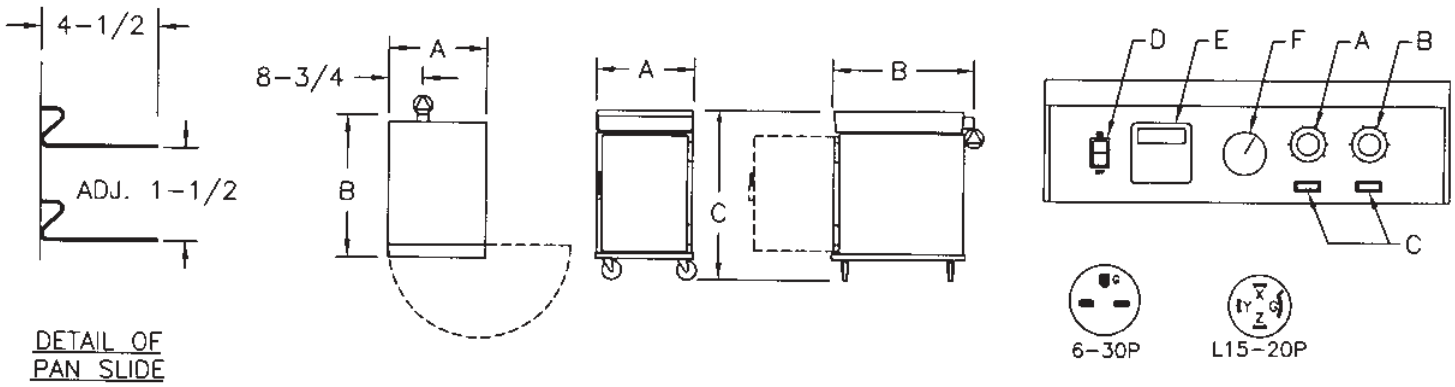

CRES-COR MODEL NO.	PAN CAP/ANGLES	PAN SIZE		DIM "A" WIDTH	DIM "B" DEPTH	DIM "C" HEIGHT	INSIDE DIMENSIONS WIDTH	INSIDE DIMENSIONS DEPTH	INSIDE DIMENSIONS HEIGHT		WEIGHT ACT.
CO-151-HUA-6	6 SETS	SEE NOTE BELOW	IN	29	36-3/4	43-3/8	21-3/4	26-15/16	27-1/2	LBS	307
			CM	73.7	93.3	110.2	55.2	68.4	69.9	KG	139

Note: Refer to pan size chart at end of section.
ALL CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

CABINET:
- Body: 22 ga. 304 stainless steel.
- Reinforcement: Internal framework of 16 ga. 304 stainless steel.
- Insulation: Fiberglass, thermal conductivity (K factor) is .23 at 75˚F. 1-1/2" in back wall, door, base; 2" in side walls.
- Air tunnel: 20 ga. 304 stainless steel, lift-out type; mounted on back panel.

BASE:
- One piece construction, .190 aluminum.
- Casters: 5" dia., swivel, neoprene tires, 1-1/4 wide, load cap. 200 lbs. each, temp. range -20˚/+160˚F. Bearings are sealed and permanently lubricated. Front casters equipped with brakes.

DOOR:
- Field reversible.
- Formed 22 ga. 304 stainless steel.
- Latch: Chrome plated steel, high temperature ceramic magnetic type; mounted inboard.
- Hinges: Heavy duty chrome plated steel, lift-off type; mounted inboard.
- Gasket: Perimeter type, silicone.
- Pan stop channel: Attached to inside of door.

PAN SLIDES:
- Formed 16 ga. 304 stainless steel angles, 1-3/4 x 4-1/2 mounted on lift-out posts.
- (6) sets of angles adjustable on 1-1/2" centers.
- Grids (3): Nickel chrome plated steel, raised wire 17" x 25".

POWER REQUIREMENTS AVAILABLE:
- 4700 Watts, 208 Volts, 60 Hz., single phase, 22.6 Amps., 30 Amp. service.
- 4700 Watts, 240 Volts, 60 Hz., single phase, 19.6 Amps., 30 Amp. service.
- 4700 Watts, 208 Volts, 60 Hz., three phase, 13 Amps., 20 Amp. service.
- 4700 Watts, 240 Volts, 60 Hz., three phase, 11.3 Amps., 20 Amp. service.

POWER UNIT COMPONENTS: (refer to above drawing)
- Body: Formed 20 ga. 304 stainless steel with black control panel, recessed and tilted 5˚.

A) Thermostat (holding): Solid state, room ambient to 250˚F. (121˚C.).
B) Thermostat (cook/retherm): Solid state, room ambient to 350˚F. (176.5˚C.).
C) Pilot lights (2).
D) Switch: Lighted ON-OFF rocker type.
E) Timer: 24 hr. digital countdown; infinite memory retention.
F) Thermometer.

- Power cord: Permanent, 6 ft., 10/3 ga. with right angle plug.
- Heaters (3): 1470 Watts each.
- Blower motors (3).
- Vent fans (2).
- Fuses (2): 3 Amp.

INSTALLATION REQUIREMENTS:
- Check local vent hood codes for mobile Roast-N-Hold ovens.

SHORT FORM SPECIFICATIONS

Cres-Cor Roast-N-Hold Half Size Convection Oven Model CO-151-HUA-6. Removable power unit 20 ga. 304 stainless steel, recessed control panel. Cabinet and door 22 ga. 304 stainless steel; stainless steel internal frame; coved corner interior. Fiberglass insulation in sides 2"; back, door and base 1-1/2". High temperature magnetic latch. (6) sets universal angles for multiple pan sizes and spacing. One piece base .190 aluminum. 5" swivel neoprene casters, permanently lubricated, sealed ball bearings. Load capacity 200 lbs. each. 4700 Watts,_____ Volts, ____ Hz., _____ Phase. 2 year parts warranty. Provide the following accessories: ____ ____ ____ . NSF, UL, CUL listed.

CRES COR®

5925 Heisley Road • Mentor, OH 44060-1833
Phone: 877/CRESCOR • Fax: 440/350-7267
www.crescor.com

© Crescent Metal Products, Inc. 1998 All rights reserved.

In line with its policy to continually improve its products, CRES-COR reserves the right to change materials and specifications without notice.

Litho in U.S.A.